


HOMEPLACE

by Capital Lighting Fixture Co.

LIGHTING

NOTE: THE APPEARANCE OF FIXTURE AND QUANTITY OF SOCKET(S) IS SUBJECT TO THE ACTUAL FIXTURE YOU RECEIVED, WHICH IS DIFFERENT FROM THE FIGURE IN THIS INSTRUCTION SHEET, BUT IN SAME INSTALLING WAY AS BELOW.

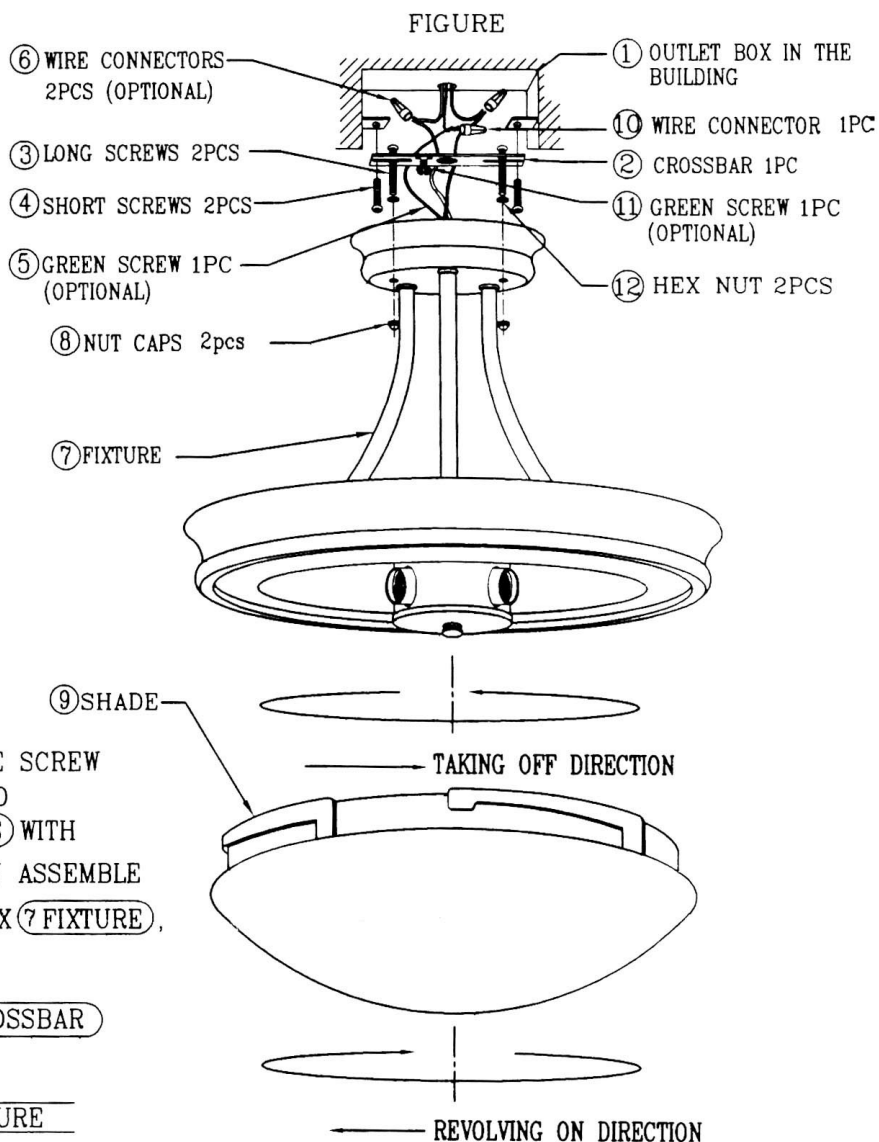

(3) INSTALLING WAY:

① OUTLET BOX IN THE BUILDING

② CROSSBAR 1PC

③ LONG SCREWS 2PCS: INSERT INTO THE SCREW HOLES ON ② CROSSBAR AND ADJUST TO SUITABLE LENGTH. FIX ③ LONG SCREWS WITH ⑫ HEX NUTS ONTO ② CROSSBAR. WHEN ASSEMBLE ⑧ NUT CAPS ON ③ LONG SCREWS TO FIX ⑦ FIXTURE, ③ LONG SCREWS WILL NOT TURN.

④ SHORT SCREWS 2PCS : FASTEN ② CROSSBAR TO ① OUTLET BOX WITH ④ SHORT SCREWS.

⑤ FIXTURE GROUND WIRE: TWIST ⑤ FIXTURE GROUND WIRE AND GROUND WIRE FROM OUTLET BOX, FIX THEM WITH ⑬ WIRE CONNECTOR (PROVIDED).

⑥ WIRE CONNECTORS 2PCS(OPTIONAL): CONNECT FIXTURE WIRES WITH SUPPLY WIRES TOGETHER.

⑦ FIXTURE

⑧ NUT CAPS 2PCS: MAKE ③ LONG SCREWS PASS THROUGH THE HOLES OF ⑦ FIXTURE, AND SECURE FIXTURE AGAINST CEILING WITH ⑧ NUT CAPS. TURN ON ELECTRICITY AFTER ASSEMBLING THE BULBS TO TEST IF THE ELECTRICITY CAN WORK NORMALLY. (MAKE SURE THE BULBS CAN WORK)

⑨ SHADE: PUT NECK OF ⑨ SHADE IN PLACE BY INSERTING DIMPLES LOCATED IN ⑦ FIXTURE, REVOLVE ⑨ SHADE CLOCKWISE GENTLY & SLOWLY UNTIL IT CAN NOT BE REVOLVED ANY MORE. BUT DO NOT REVOLVE SHADE WITH STRONG FORCE AND TOO FAST TO AVOID OVER TIGHTNESS OF SHADE AND CAUSE DIFFICULTY WHEN TAKING OFF SHADE IN THE FUTURE. REVOLVE SHADE BY OPPOSITE DIRECTION WHEN TAKING OFF SHADE. TAKE CARE WHEN ASSEMBLING OR DISASSEMBLING ⑨ SHADE TO AVOID BREAKAGE OF ⑨ SHADE.

ITEM NO. : 2037, 2047