


## ASSEMBLY AND INSTALLATION INSTRUCTIONS for the **330418** Fixture

### Important Safety information (Please read before proceeding)

1. Remove the fixture, parts and all mounting hardware bags (orange) from the carton and verify that all parts are present according to the illustration sheet. All parts must be used as indicated. Do not replace any parts, leave any parts out, or use any parts which are worn out or broken. **Failure to follow the instructions could cause a hazardous situation, voids the warranty and violates the U.L. listing of the fixture.**
2. To prevent the electric shock, turn off the main power at the circuit breaker before installing the fixture. **NEVER attempt to install, clean or replace bulbs without shutting off the electricity to the fixture.**
3. **Never use light bulbs with wattage ratings that exceed the fixtures maximum rating.** Always make sure the electric current is turned off before changing the bulbs.
4. If you experience difficulties installing the lighting fixture or it fails to work as expected, please contact a local qualified licensed electrical contractor.
5. Please contact your local Capital Lighting Fixture reseller with any assembly or installation questions. Your local reseller can also provide you with replacement parts for your new fixture.

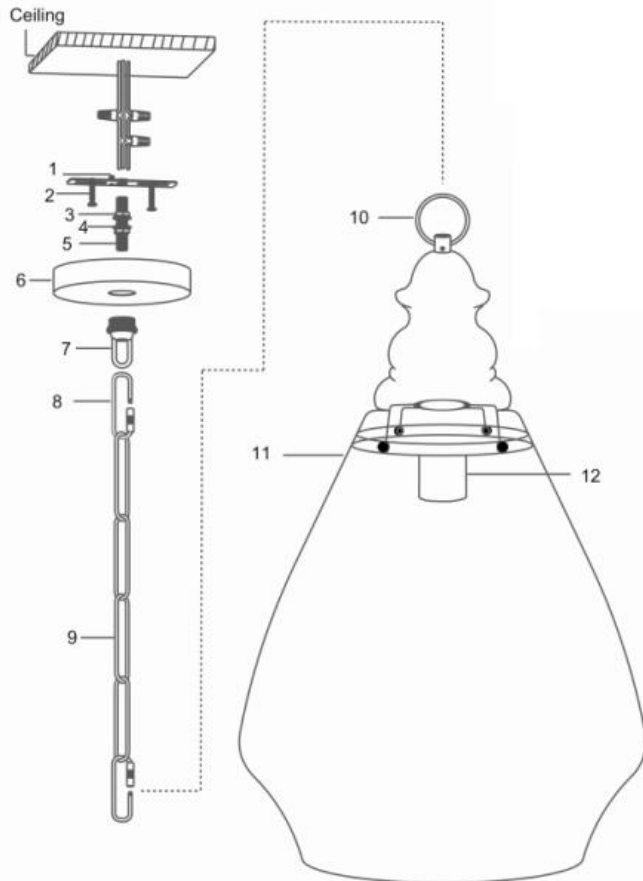

### Components

1. Mounting Bar w/ Green Screw
2. Outlet Box Mounting Screw
3. Hex Nuts
4. Washer
5. Nipple
6. Canopy
7. Threaded Ring & Screw Collar Loop
8. Quick change link
9. Chain
10. Loop
11. Fixture with wire frame
12. Candle

### Assembly Instructions for the 330418 fixture

1. Please open the box and take out all the contents from the box including the assembly instructions stuck on the flap of the box .
2. Place the glass with wire fixture on the table near the place where fixture is to be fixed .
3. Unscrew the metal candle from the fixture with the cap and wooden bazel on one end and canopy on the other
4. Now place the wooden bazel with the lamp holder on top of the wire fixture of the glass and put the holder in the hole of the wire fixture
5. Use the candle cover and screw it over the holder to tighten and fix the glass
6. Go to the other end and unscrew the ring on the screw collar loop and let the ring and canopy slide over the wire.
7. Take the cross bar, tighten it and place it over the electrical outlet box and using screws provided in the hardware pack fix it or use the fasteners and screws provided to fix on the ceiling after drilling holes.
8. Connect fixture ground wire to the outlet box ground wire with wire connector supplied; connect the common wire of the lamp cord to the power supply white wire with wire connector supplied; connect supply wire of the lamp cord to the power supply black wire with wire connector supplied. *Note: This fixture is wired using 2 conductor Lamp cord. The insula on between the two conductors on the lamp cord can be split down the center for better access to the two conductors. The common wire on the lamp cord is identified as the conductor with the printed marking and or the ribs embossed in the rubber wire insula on.*
9. Now slip the canopy up to the ceiling passing through screw collar loop and tighten it on the canopy with the fixing screw ring
10. Put the required wattage of lamps as indicated on the candle and the lamp is ready to use