




LIGHTING FIXTURE COMPANY

ASSEMBLY AND INSTALLATION INSTRUCTIONS for the **4444** Fixture

Important Safety information (Please read before proceeding)

1. Remove the fixture, parts and all mounting hardware bags (orange) from the carton and verify that all parts are present according to the illustration sheet. All parts must be used as indicated. Do not replace any parts, leave any parts out, or use any parts which are worn out or broken. **Failure to follow the instructions could cause a hazardous situation, voids the warranty and violates the U.L. listing of the fixture.**
2. To prevent the electric shock, turn off the main power at the circuit breaker before installing the fixture. **NEVER attempt to install, clean or replace bulbs without shutting off the electricity to the fixture.**
3. **Never use light bulbs with wattage ratings that exceed the fixtures maximum rating.** Always make sure the electric current is turned off before changing the bulbs.
4. If you experience difficulties installing the lighting fixture or it fails to work as expected, please contact a local qualified licensed electrical contractor.
5. Please contact your local Capital Lighting Fixture reseller with any assembly or installation questions. Your local reseller can also provide you with replacement parts for your new fixture.

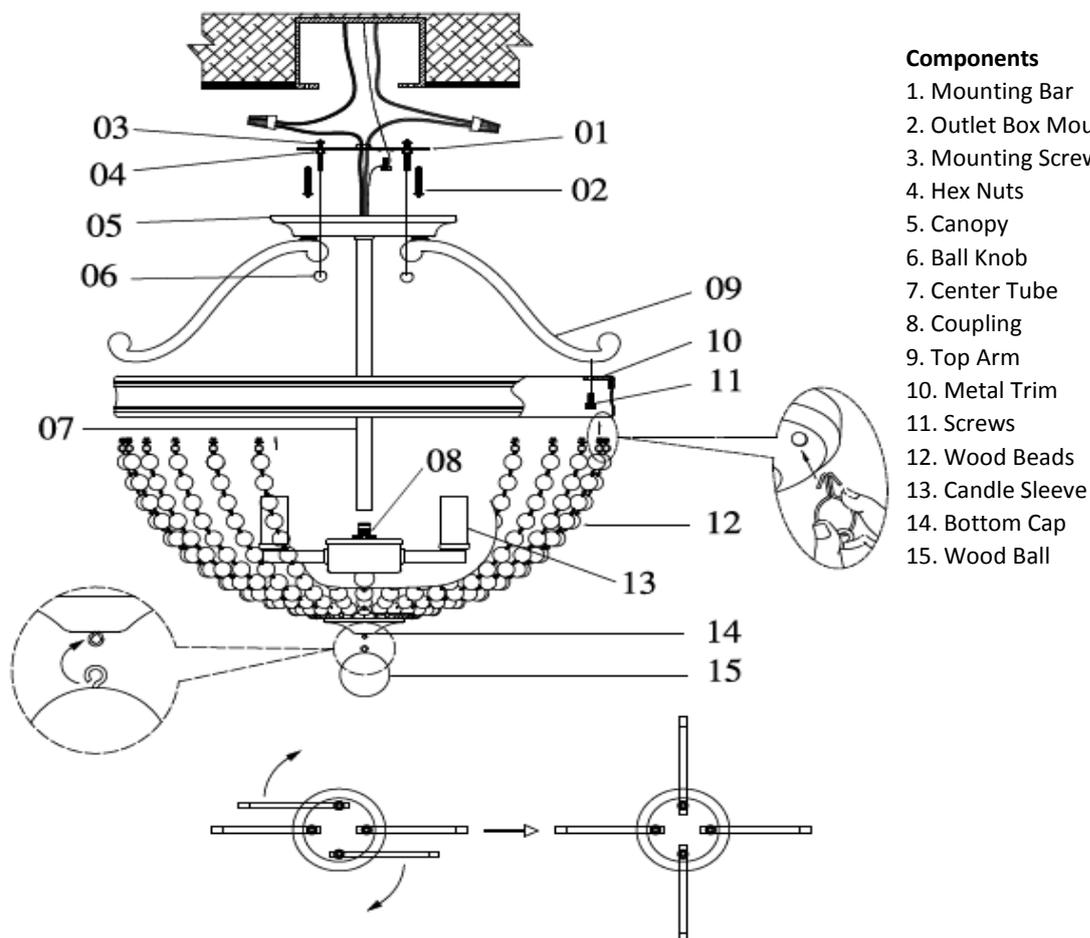

Components

1. Mounting Bar
2. Outlet Box Mounting Screws
3. Mounting Screws
4. Hex Nuts
5. Canopy
6. Ball Knob
7. Center Tube
8. Coupling
9. Top Arm
10. Metal Trim
11. Screws
12. Wood Beads
13. Candle Sleeve
14. Bottom Cap
15. Wood Ball

Assembly Instructions for the 4444 fixture

1. Screw Center Tube (7) onto Coupling (8) of light cluster distributor.
2. Attach Metal Trim (10) onto top arms end (9), then secure them together with Screws (11).
3. Insert Wood Beads (12) into the hole at the bottom of Metal Trim (10), and hang the Wood Ball (15) onto ring of Bottom Cap (14).
4. Find appropriate threaded holes on Mounting Bar (1), and assemble Mounting Screws (3) into threaded holes.
5. Attach Mounting Bar (1) to Outlet Box with Outlet Box Mounting Screws (2) and Hex Nuts(4).
6. Connect fixture ground wire to outlet box ground wire with wire connector supplied; connect white fixture wire to power supply white wire with wire connector supplied; connect black fixture wire to power supply black wire with wire connector supplied.
7. Push Fixture to ceiling, carefully passing Mounting Screws (3) through holes in Canopy (5), then verify all wires are securely inside Canopy (5). Finally, secure fixture to ceiling with Ball Knobs (6).