## **Update on Capital Lighting's RLM Warehouse Fixtures (3/31/20)**

We have received feedback that attaching the warehouse shade to the Gooseneck arm or other wall-mounted/rod arrangements is confusing. Please reference this document (see next page) with details about using these two parts together. Please note all assembly instructions are included in the SHADE box.

We are adjusting our RLM assortment to include shades that are easier to use with Gooseneck Arms. They will mirror the way that our current Angle Shades are designed, with no cord, only 2 wires for running through the arm(s). The current "pendant" version of the shades with canopy included will still remain in the assortment as well.

The new "Shade Only" item numbers are listed below and will be available later this fall.

14" diameter shade only	17" diameter shade only
with individual wires	with individual wires
(current cord version # 936311)	(current cord version # 936312)
936315BK	936316BK
936315GV	936316GV
936315OZ	936316OZ



See next page for the clarification on how to use the current parts during the transition to these new part numbers. More information (including pricing) about the new part numbers will be provided as soon as they are available.

Thank you!


Your Capital Lighting Team

## How to Prepare Capital Lighting's RLM Warehouse Shades for Wall Mounting


1. Remove the Canopy from the wire (confirm canopy comes already on the wire in the box)



2. Remove the Cord Gland and short Coupling that come pre-installed on the cord

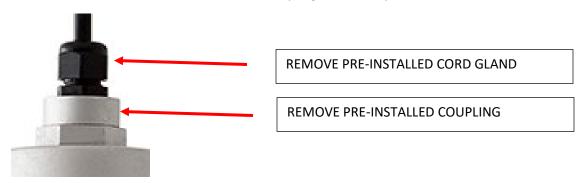

3. Use the rubber gasket and 2" coupling (included in the box with the shade – CONFIRM) to attach the shade to any rod part (including swivel, elbow, rod or gooseneck arm).

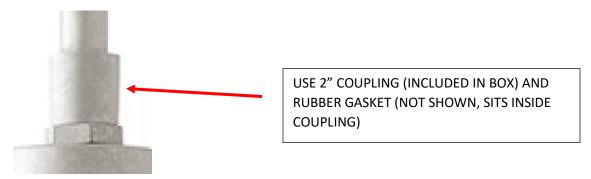

Please reference the instructions included in the SHADE box for all assembly directions.